

- 35mm Standard-DIN Rail DIN EN 50022
- Installation-appliance-standard DIN 43880
- Integral screen




Mechanical Data	Value	Standard
Degree of protection	IP20	IEC 60529
Connector interface	RJ45 / SC-RJ	IEC 60603-7 RJ45 IEC 61754-24 SC-RJ
Load ability	≥ 100N	IEC 61753-11-1
Extraction force	≥ 40N	IEC 61753-11-1
Ambient temperature (operation)	-10 °C ... 60 °C	IEC 60068-2
Colour	Grey RAL 7035	

**Technical Data**

Contact material	Brass (CuSn6) tin-plated	
Housing material	PC-GF10	Material is UL-listed

**Electrical Data**

Contact resistance	≤ 5 mΩ
Input-output resistance	≤ 20 mΩ

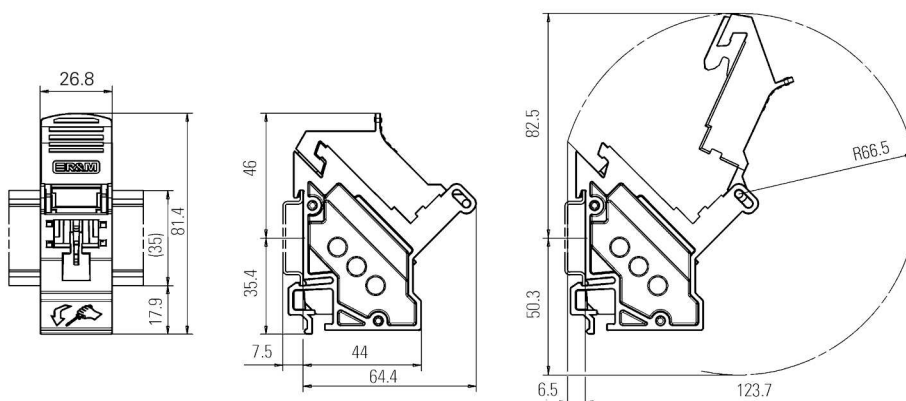

Ordering information

Part number

DRM45 DIN Rail Adapter

R314000



Convincing cabling solutions

Reichle & De-Massari AG  
 Binzstrasse 31  
 CHE – 8622 Wetzikon  
 Telephone CO: +41 44 933 81 11  
 Telefax CO: +41 44 930 49 41  
[www.rdm.com](http://www.rdm.com)