



## Duplex cables figure 0




Ø 2.0 mm - inner jacket numbered

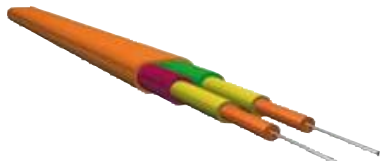

Ø 2.7 mm - inner jacket red and green

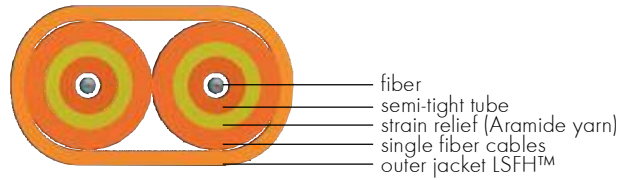

fiber  
semi-tight tube  
strain relief (Aramide yarn)  
single fiber cables  
outer jacket LSFH™

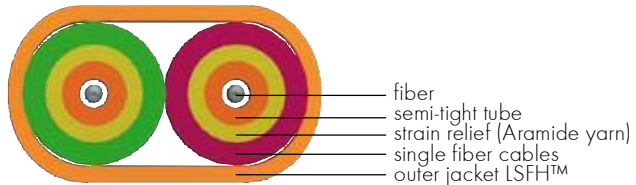

fiber  
semi-tight tube  
strain relief (Aramide yarn)  
single fiber cables  
outer jacket LSFH™

### Design

Tube	2 simplex cables with semi-tight tubes 0.9 mm	
Strain relief	Aramide yarn	
Cable jacket	LSFH™	
Outer jacket colour	E9	yellow
	G50	orange
	G62.5	orange
	OM3	turquoise

### Properties

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relieved
- Tube can be stripped up to 1 m in one piece
- Low smoke, halogen free and self-extinguishing
- Jacket material according to UL 94V-0

### Applications

- Installation in indoor areas
- Patch cable in distribution centres
- Data cable in distribution networks
- Applications with high safety requirements in case of fire

According to IEC 60794-1-2

### Ordering information

02.../CWJH-A...  
please see page 110

## Duplex cables figure 0

Specification					
Jacket Ø		3.1 x 5.2	3.5 x 6.2	mm	
Single-fiber cable Ø		2.0	2.7	mm	
Tube Ø		0.9	0.9	mm	with 1 fiber each
Channel marking on single-fiber		numbered	coloured		
Approx. weight		18	24.2	kg/km	

Mechanical properties					
Tensile strength	during installation	400	600	N	IEC 60794-1-2 E1
	in service	2 x 100	2 x 200	N	
Min. bend radius	during installation	50	50	mm	IEC 60794-1-2 E11
	in service	25	30	mm	
Crush resistance	short-term	500	1000	N/cm	IEC 60794-1-2 E3
	long-term	100	100	N/cm	
Impact resistance	Wp = 0.74 J, r = 25 mm	40	40	impacts	IEC 60794-1-2 E4
Repeated bending	r = 25 mm, weight = 2 kg	10000	10000	cycles	IEC 60794-1-2 E6

Thermal properties					
Temperature range	during installation	-10 to +60	-10 to +50	°C	IEC 61300-2-22
	in service	-20 to +70	-20 to +70	°C	
	in storage	-25 to +60	-25 to +60	°C	

Specification for singlemode at 1310 nm, for multimode at 1300 nm

Combustion properties					
Fire load		0.35	0.46	MJ/m	
Fire propagation	on a vertical single cable	p	p		IEC 60332-1
	on a vertical cable bundle	p	p		IEC 60332-3-24

p = passed

Technical data for cable types with H200 fiber might vary